


375 OUT Extreme

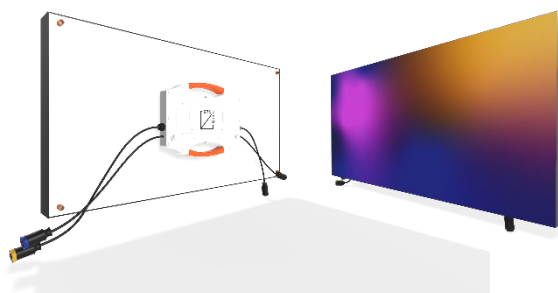

	P3.7	P4.5	P5.6	P7.5	P9
MODULE PARAMETERS					
Pixel pitch	3.75	4.5	5.6	7.5	9
Module size	360 X 360				
LED type	SMD1921		SMD2727		
Module resolution	96x96	80 x 80	64x64	48x48	40x40
CABINET SPECIFICATIONS					
Cabinet size	360 x 720				
Cabinet Materials	Aluminium				
TECHNICAL SPECIFICATIONS					
Weight	29 Kg/sqm				
Brightness	5,500 nits		7,500 nits		
Viewing Angle	160°V - 160°H				
Gray level	16				
Refresh Rate	2,880 Mhz				
Power Input	110 - 220 V				
Power consumption Maximun	930	890	860	840	780
Power consumption Average	190	180	172	155	146
Life--hours	> 100,000				
IP grade	IP67/IP66				
Operating Temperature	from -30 ~65				
Storage Humidity	10% - 95% RH				
Maintenance access	Front / Rear				
ECOACTIVE FEATURES					
Nox & Sox Abatement	50.03%				
Certification of pollution abatement	ISO 22197 from Fraunhofer institut				
Antidust	Yes				
Self-cleaning	Yes				
Anti-bacterial	Yes				