


375 IN Flexible

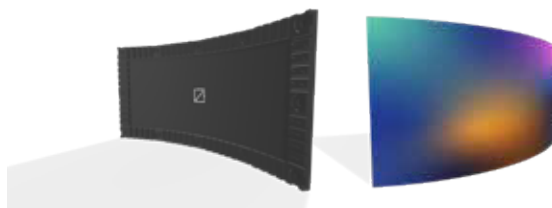

P1.875 P2.0 P2.5 P3 P4

	P1.875	P2.0	P2.5	P3	P4
Pixel pitch	P1.875mm	2.0mm	2.5mm	3.0mm	4.0mm
Module size (W x H)	240*120mm	256*128mm/ 240*120mm	320x160mm/ 240*120mm	192*192mm/ 240*120mm	256*128mm
LED type	SMD1415	SMD1415	SMD2020	SMD2020	SMD2020
Module resolution	128*64	128*64	128x64 96*48	64*64 80*40	64*32
Smallest Circle Diameter	153mm(two pieces modules circle)				
Brightness	700-1,00nits				
Viewing Angle	160°V - 160°H				
Gray level	3,84				
Refresh Rate	2880-3,840 Mhz				
Power Inputo	110 - 220 V				
Power consupcion Maximun	800W	630W	530/450W	500/550W	500W
Power consupcion Averige	400W	320W	250/220W	250/270W	250W
Life--hours	> 100,000				
IP grade	IP31				
Operating Temperature	from 0°c~60°c				
Storage Humidity	10% - 60% RH				
Maintenance access	Front or Rear				
Nox & Sox Abatement	50.03%				
Certification of pollution abetment	ISO 22197 from Fraunhofer institut				
Antidust	Yes				
Self-cleaning	Yes				
Anti-bacterial	Yes				