


## 375 IN UltraSlim

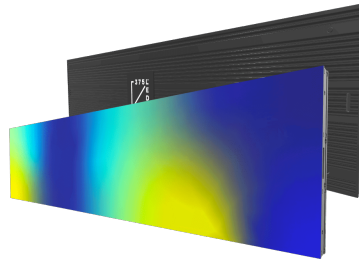

	P1.95	P2.5	P2.9	P3.9
<b>MODULE PARAMETERS</b>				
Pixel pitch	1.95 mm	2.5 mm	2.98 mm	3.91 mm
Module size	250 x 250 mm			
LED type	SMD1515			SMD 2020
Module resolution	128 X 128	100 x 100	84 x 84	64 x 64
<b>CABINET SPECIFICATIONS</b>				
Cabinet size	1,000 x 250 x 33 mm   750 x 250 x33 mm   500 x 250 x33 mm			
Cabinet Materials	Aluminium			
<b>TECHNICAL SPECIFICATIONS</b>				
Weight	23.2 Kg/sqm			
Brightness	800 nits		800 -1,000 nits	1,000-1,200 nits
Contrast Ratio	5,000:1			
Viewing Angle	160°V - 160°H			
Gray level	14 Bits			
Refresh Rate	3.840 Hz			
Power Input	AC90-264V			
Power consumption Maximun	800 W/m2			
Power consumption Average	100-250 W/m2			
Life--hours	> 100,000			
IP grade	IP43			
Operating Temperature	from -20°C~60°C			
Storage Humidity	10% - 90% RH			
Maintenance access	Front			
<b>ECOACTIVE FEATURES</b>				
Nox & Sox Abatement	50.03%			
Certification of pollution abetment	ISO 22197 from Fraunhofer institut			
Antidust	Yes			
Self-cleaning	Yes			
Anti-bacterial	Yes			